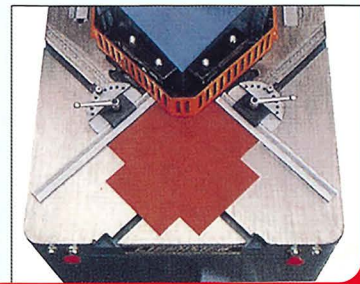



HYDRAULIC NOTCHER

SPECIFICATIONS MODEL	Capacity mm(in)	Max .notch mm(in)	Edge notch(XxY) mm(in)	Ram stroke mm(in)	Stroke Per SPM	Moter HP	Shipping weight kg(lbs)	Size of case mm(in)
LE-25H	6.4(1/4")	254 x 254 (10" x 10")	100 x 150 (3.94 x 5.91)	38(1½")	21	5	1300 (2860)	1270 x 1143 x 1321 (50" x 45" x 52")


SPECIAL FEATURES:

1. Dual-head design: This design can be done for notching in one head and edge punching in another head.
2. Control system : Centralized control box with remote foot switch provides single, inch and continuous stroking operation.
3. Fine adjustment : A good scale for small materials positioning with a fine adjustment on X-axis and stop on Y-axis is provided.
4. material holder : In order to prevent deviation during cutting, this material holder can hold the material while lowering the blade.


STANDARD EQUIPMENTS:

1. Notching blade
2. Edge punching blade


10H (25H)

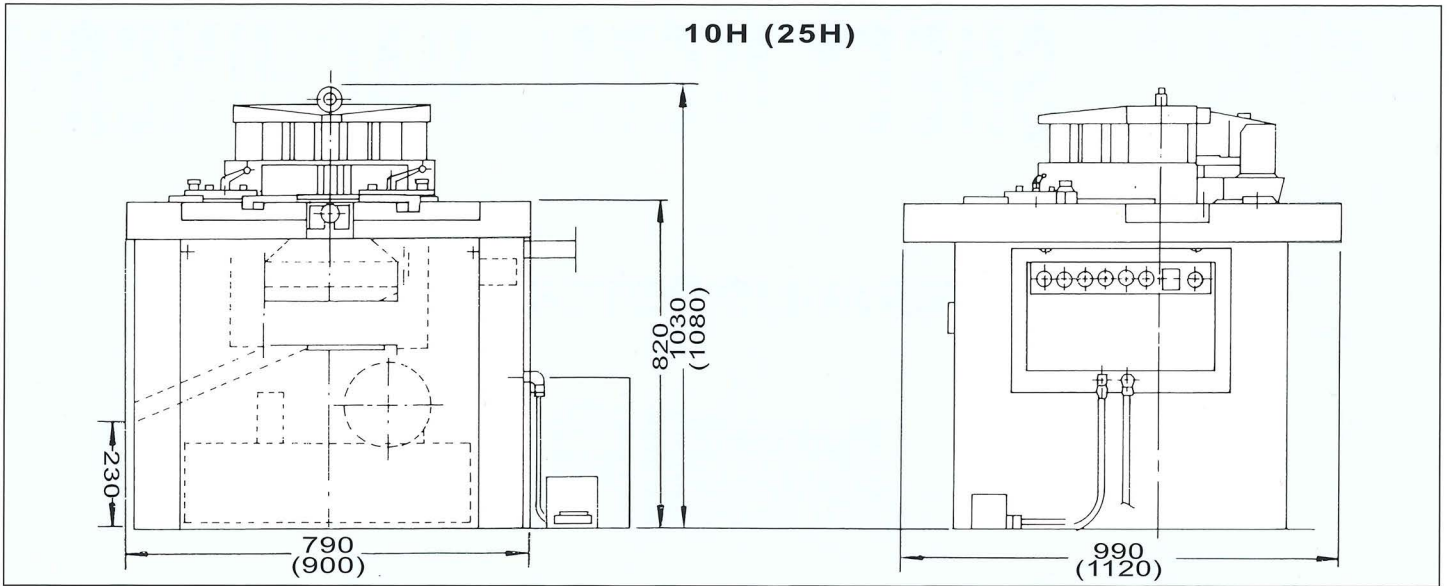

WORKING METHOD: Notching

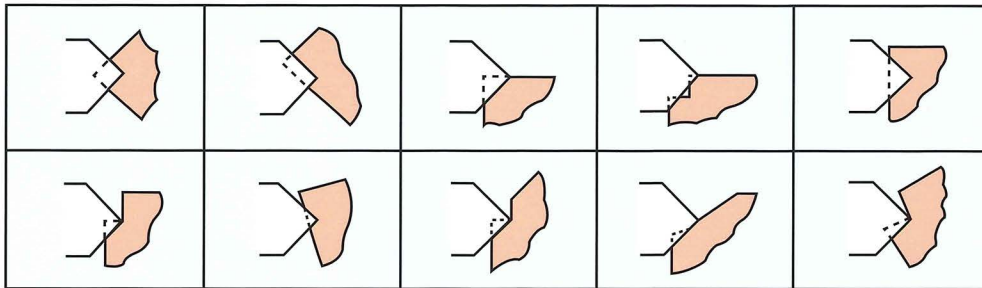

Edge punching 10H (25H)

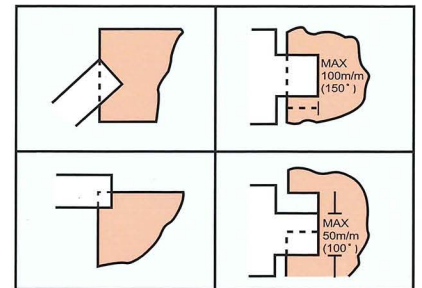

* The contents of this brochure are for reference only and are subject to change without notice.



LIEN HSIEN MACHINERY CORP.

No. 63, LIN SEN EAST ROAD, CHIA-YI, 600 TAIWAN
 TEL +886-5-272 1188
 FAX +886-5-272 1177
 EMAIL lemas@lemas.com.tw
<http://www.lemas.com.tw/>

Taipei Office

8F, No. 9-2, Sec. 1, XIN YI ROAD, TAIPEI, 10048 TAIWAN
 TEL +886-2-2322 4766
 FAX +886-2-2322 2865
 EMAIL paulyeh@lemas.com.tw